



Motor DXD 150-K BSY+

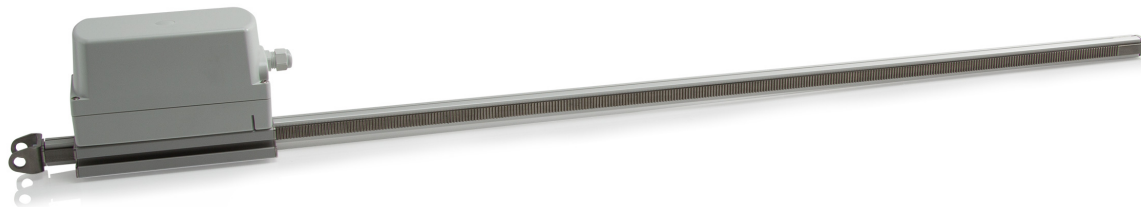

Motor powered in 230 V particularly adapted for the window of large format

Price: 2040,95 €

[Poser une question sur ce produit](#)

Descriptive notes: For openings of evacuation of fumes, the system Euro? Désenfumage D+H according to the norm EN 12101?2, as well as for the daily ventilation

- » » Motor equipped with the electronic synchronization system controlled by microprocessor BSY+
- » » Direct control via 230 V AC
- » » Function of fast march (HS) for a particularly fast opening of windows in case of fire (Désenfumage)
- » » Possibility of using up to 4 motors per synchronous group
- » » Groove in the tube of the motor ensuring a flexible installation and the adjustment of the pivot range
- » » Cable passage possible by the top and the bottom
- » » Functions of the motor and various parameters of the motor programmable
- » » Speed of march in sense FERMÉ reduced to 5 mm/s (protection of stop of passive closure)
- » » Inversion to command temporized in case of detection of an obstacle in sense FERMÉ (protection of stop of active closure)

Power supply 230 V AC / +10 % ... -15 % / 50 Hz

Duration of start 30 %

Push force 1500 N

Traction force 1000 N

Nominal locking force 1100 N

Life span 20000 double strokes *

Speed of march OUVERT 7,1 mm/s

Speed of march OUVERT - HS 17 mm/s

Speed of march FERMÉ 7,1 mm/s

Type of protection IP 64

Temperature range -5 °C ... +75 °C

Temperature stability B300 (30 min / 300 °C)

Case Aluminium / Polycarbonate

Surface Thermolaquée

Connection Cable in silicone of 2,5 m



ALU
TECHNOLOGIE
SERVICES

2, rue de la douane
espace Rive Droite
54000 NANCY
Tél : 33 383 18 92 92

L x H x P 88 x 187 x 131 mm

Commentaires des clients

Il n'y a pas encore de commentaire sur ce produit.

