



Motor DXD 150-K BSY+

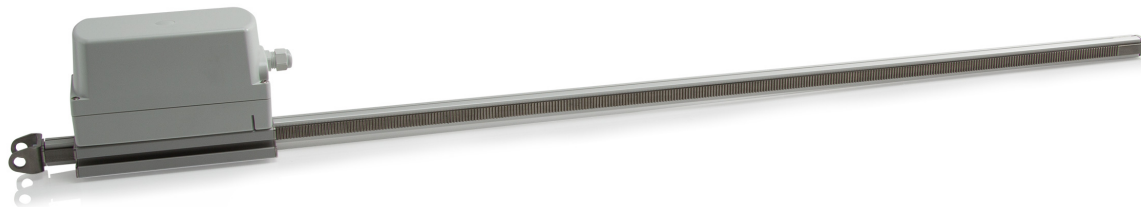

Motor powered by 230 V particularly adapted for large window

Price: 2040,95 €

[Ask a question about this product](#)

Descriptive notes: For openings for evacuation of smoke, the system Euro? Désenfumage D+H according to the standard EN 12101?2, as well as for the natural ventilation

- » » Motor equipped with the electronic synchronization system controlled by microprocessor BSY+
- » » Direct control via 230 V AC
- » » Function of fast march (HS) for a particularly fast opening of windows in case of fire (Smoke evacuation)
- » » Possibility of using up to 4 motors per synchronous group
- » » Groove in the motor tube ensuring a flexible installation and the adjustment of the pivot range
- » » Cable passage possible by top and bottom
- » » Functions of the motor and various parameters of the motor programmable
- » » Speed of march in sense FERMÉ reduced to 5 mm/s (passive stop protection)
- » » Inversion to temporary command in case of detection of an obstacle in sense FERMÉ (active stop protection)

Power supply 230 V AC / +10 % ... -15 % / 50 Hz

Duration of march 30 %

Push force 1500 N

Traction force 1000 N

Nominal locking force 1100 N

Life span 20000 double strokes *

Speed of march OPEN 7,1 mm/s

Speed of march OPEN - HS 17 mm/s

Speed of march FERMÉ 7,1 mm/s

Protection type IP 64

Temperature range -5 °C ... +75 °C

Temperature stability B300 (30 min / 300 °C)

Case Aluminium / Polycarbonate

Surface Thermolaqued

Cable connection Silicone cable of 2,5 m



ALU
TECHNOLOGIE
SERVICES

2, rue de la douane
espace Rive Droite
54000 NANCY
Tél : 33 383 18 92 92

L x H x P 88 x 187 x 131 mm

Commentaires des clients

Il n'y a pas encore de commentaire sur ce produit.

